

Android: Digi iMobile Touch Lite App

Digi iMobile Touch Lite is an Android app that allows you to remotely view your **DH200/ 200+/230/ 250** series DVR.

NOTE: Digi iMobile Touch Lite is capable of **viewing only**.

NOTE: These instructions are based on the HTC Wildfire smartphone. For specific installation instructions, consult your smartphone's user's manual.

Compatible Devices

- Android OS (2.1 and above, touch screen models only)
- Digimerge DH200/200+/230/250 Series DVR

Prerequisites

- Port **80** (or whichever port your system is using) must be port forwarded to your router
- You must create a DDNS account, and have the DDNS settings configured in your DVR
- The DVR must have internet access
- You must have a [Digimerge DDNS](#) address to log in remotely
- An Android Market account

NOTE: You will need to create an Android Market account to download the app.

Installation Steps

1. Search for **DigiiMobile Touch Lite** in the [Android Market](#). Follow the on-screen instructions to install the app.



Search for **digiimobile touch lite**

Starting Digi iMobile Touch Lite

- Tap on the Digi iMobile Touch Lite icon () to start the app.

Configuring Digi iMobile Touch Lite

Once you have installed the application, enter your DVR's information to connect remotely.

To enter your DVR information into Digi iMobile Touch Lite:

1. Press the Menu button on your phone, and then tap **Add Device**.



Tap Add Device



You can add a maximum of two (2) DVRs to the Device list.

2. Enter the following:

- **Name:** Enter the DVR name of your choice.
- **IP/Host:**
 - Enter the local IP of the DVR, followed by a colon, followed by the DVR's port number OR
 - Enter the DDNS address of the DVR, followed by a colon, followed by the DVR's port number (i.e. touch.digimerge.net:80)
- **Username:** Enter the DVR's user name (by default, admin)
- **Password:** Enter the DVR's password (by default, 000000)

3. Tap **Done** to continue.



Enter DVR name

Enter DVR DDNS address or local IP address

Enter DVR user ID (by default: admin)

Enter DVR password (by default: 000000)




You must include the port number when entering the DVR's DDNS or LAN address.

*Phone interface may vary depending on model.

Connecting to your DVR

1. From the Device List, tap the name of your DVR to connect.

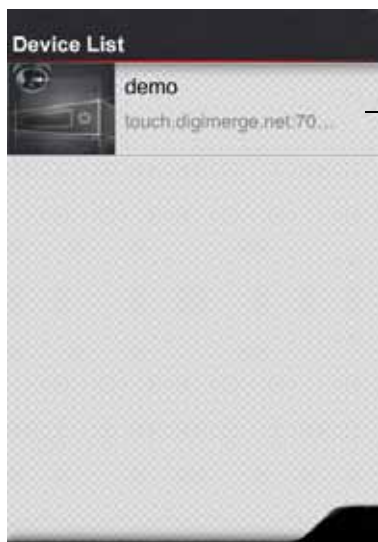


Tap the name of your DVR

To remove a DVR:

Press and hold the selected DVR, then tap Delete Device.

Digi iMobile Touch Lite Interface

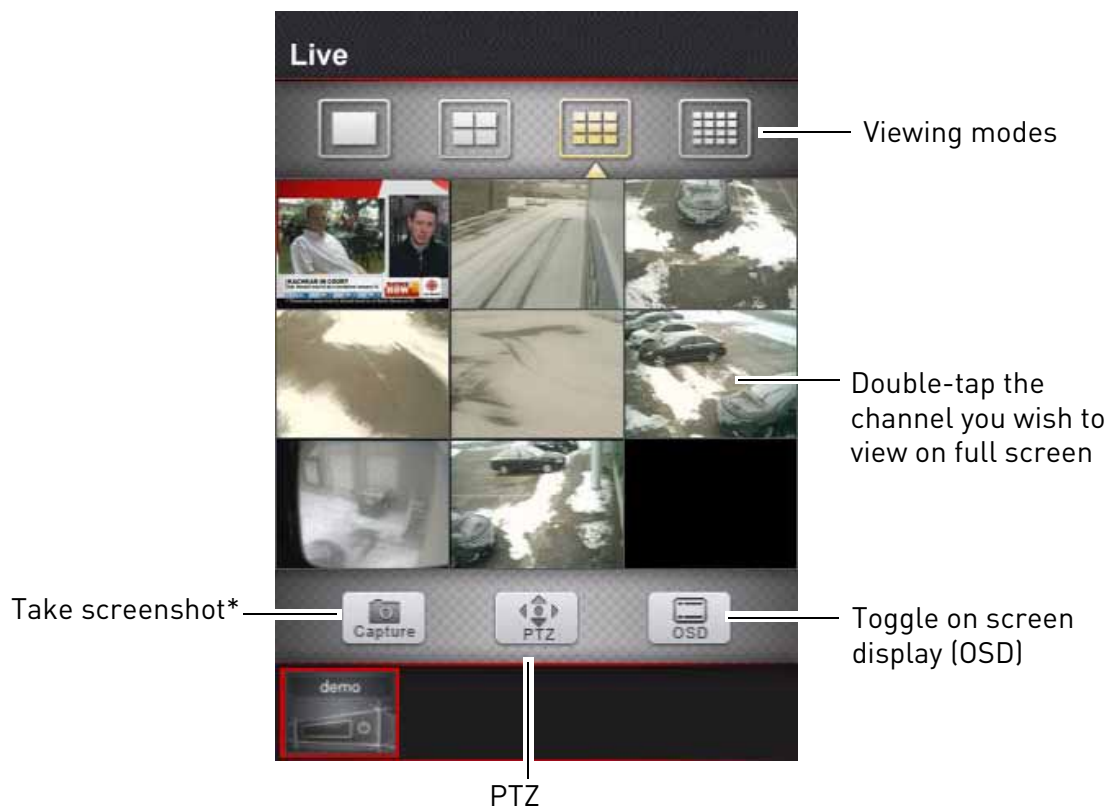

* Screenshots are stored in your phone's photo album

Changing Viewing Modes

- Touch     to change viewing modes.

Single channel view




Tap the single channel button to change channels

Quad View



9-channel view

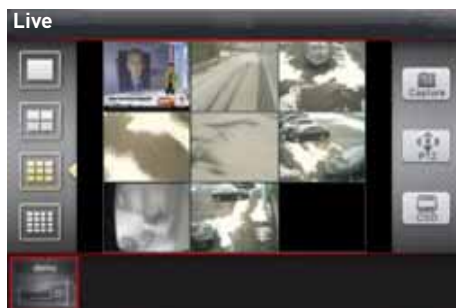

16-channel view



Rotating the Screen



Rotate your phone to change the image orientation.

Toggling the On Screen Display (OSD)

- Tap the **OSD** button to turn the OSD on/off. The OSD displays the recording status and DVR time.

OSD Off



OSD button

OSD on



DVR Time

PTZ

To control connected PTZ cameras to the DVR:

1. Select the channel that the PTZ camera is connected to in single channel mode.
2. Tap the **PTZ** button.
3. Tap the arrows to pan/tilt the camera. Tap **+** and **-** to zoom in and out.



Tap arrows to pan and tilt camera

Tap **+** / **-** to zoom in or out

PTZ button